


MAX LIFTING HEIGHT

9,5 m

n° 3 positions of stabilizers







CRANE CAPACITY

2,9 t x 1,5 m

max ground clearance for self loading 925 mm

WORKING RADIUS








8,7 m x 0,2 t

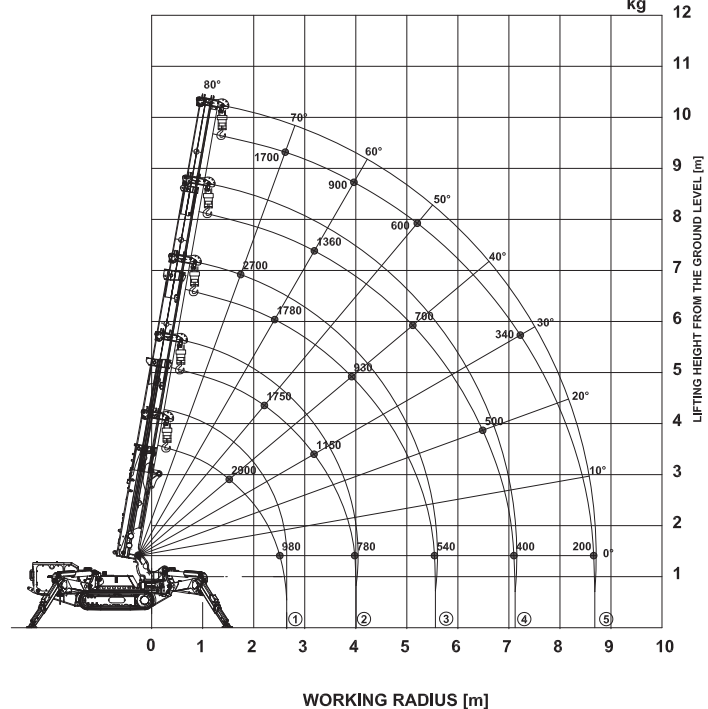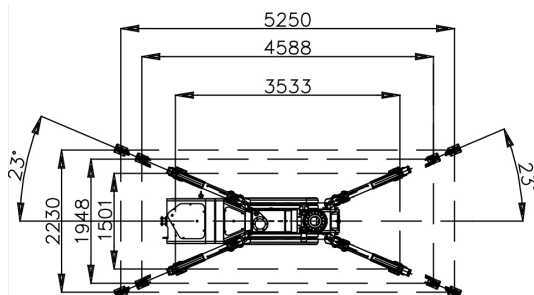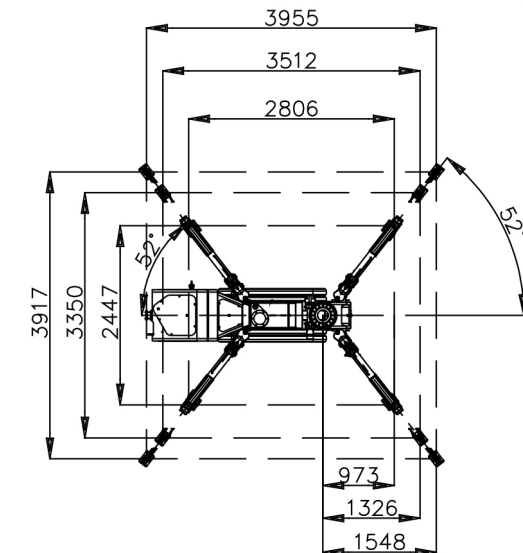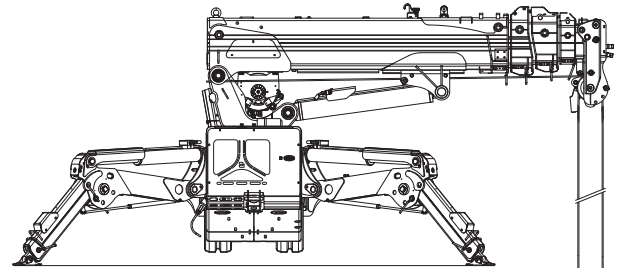

4 Fall
13.12 m

2 Fall
26.25 m

1 Fall
53 m
1000 kg max

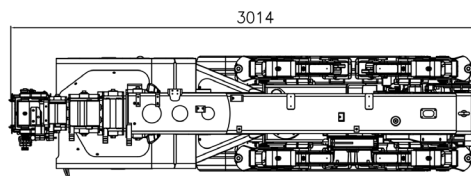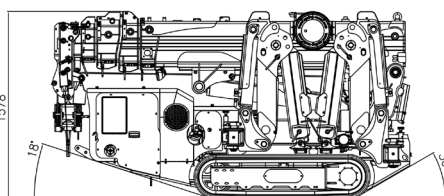

endless

3,2 km/h

2965 kg

30%

23%

24 kN

66 kN/m²

3,5 t

LOAD CAPACITIES FROM THE ROTATION CENTER

② SECOND STAGE EXTENDED BOOM LENGTH 2,2 m - 4 m

up to	2,2m	3,5m	4m
max. extended	1750	1000	780

③ THIRD STAGE EXTENDED BOOM LENGTH 4 - 5,5 m

up to	2,5m	3m	3,5m	4m	4,5m	5m	5,5m
max. extended	1750	1600	1000	900	850	700	540

④ FOURTH STAGE EXTENDED BOOM LENGTH 5,5 - 7,1 m



up to	2,7m	3,5m	3,5m	4m	5m	5,5m	6,5m	7,1m
max. extended	2600	1200	1200	950	700	600	500	400

⑤ FIFTH STAGE EXTENDED BOOM LENGTH 7,1 - 8,7 m

up to	2,5m	3,5m	4m	4,5m	5m	6m	7m	8,7m
max. extended	1800	1200	900	750	700	550	430	200

+ hydraulic jib


max lifting height
12,5 m

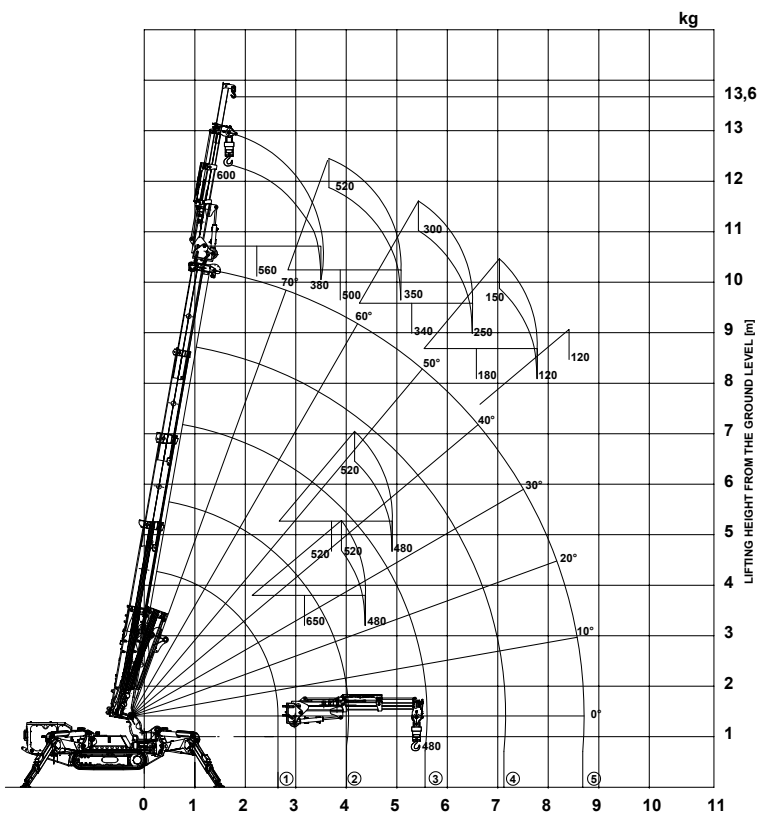


2965 kg




min 9,5m
max 12,5m

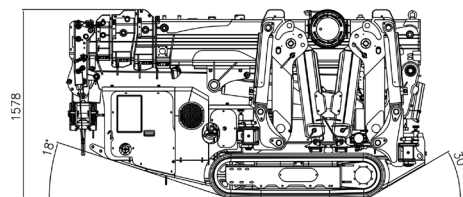

3086

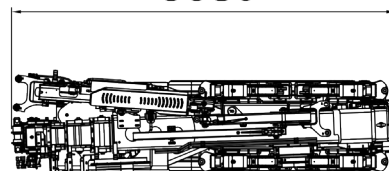

877



730

Before use , please read the Operartion Manual.

Due to improvements the specifications are subject to change without notice.

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

Palazzani
INDUSTRIE

Palazzani Industrie S.p.A. Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073 platforms@palazzani.it www.palazzani.it

NC 873 A 22